

HELI

WORLD CLASS

CPCD 50/60/70/80/90/100

W2K2/QCK2

CP(Q)YD 50/60/70

KU3K2/KU1K2



- FULL MINE SPEC OPT
- FULLY ENCLOSED CABS



5-10 t

Forklift trucks



Sold and serviced by

✉ sales@evcore.com.au

Western Australia
Sales: 0400 665 088

8 Alex Wood Drive
Forrestdale, WA 6112

Central Australia
Sales: 0486 199 045

35-37 Cavan Road
Gepps Cross, SA 5094

Eastern Australia
Sales: 0400 459 097

39 Boron Street
Sumner, QLD 4074

www.reactinternational.com.au



ECONOMIC AND ENERGY SAVING

01~02



SAFE AND RELIABLE

03~04



SMART AND COMFORTABLE


05~06



CONVENIENT MAINTENANCE

07~08


ECONOMIC AND ENERGY SAVING

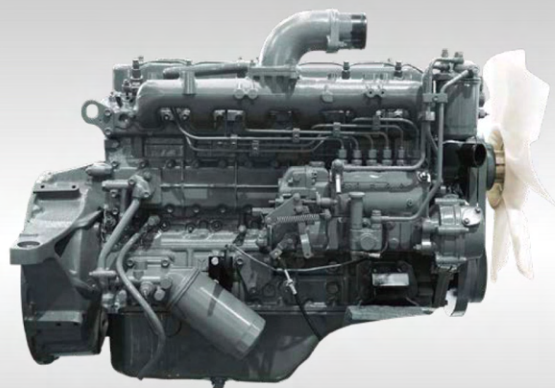

Classic engine, energy saving and reliable



Standard LED lamps, energy saving, more brighter, long service life

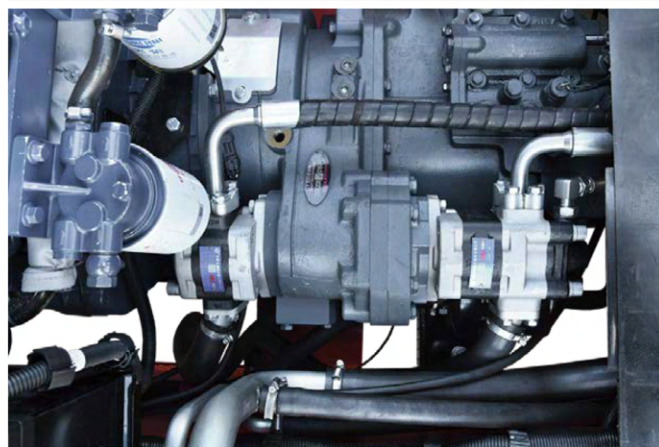

Load sensing steering and dual pump confluence technology, energy consumption reduce by 10%



SAFE AND RELIABLE



The independently developed gearbox has experienced nearly 30 years of technical innovation and market validation



TCast steel driving axle housing ensure reliable structure; Standard drum brake, wet brake as optional.




Rain test



Impact test of overhead guard



Frame type upper beam, more reasonable structure, enhance the rigidity and strength

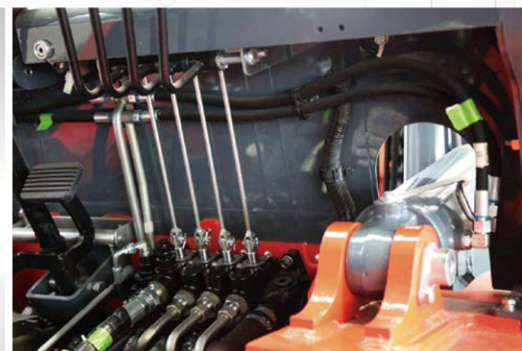

Large diameter hydraulic pipe, Standard 24 degrees conical seal.




Optional configurations for safety: Three sides lights, Rear working lamps, Blue light, Extinguisher, Warning light, Reversing radar and camera.

SMART AND COMFORTABLE


The rubber hose is hidden behind the chain to achieve good front view.

RELIABLE SPECIAL DESIGNED INSTRUMENT

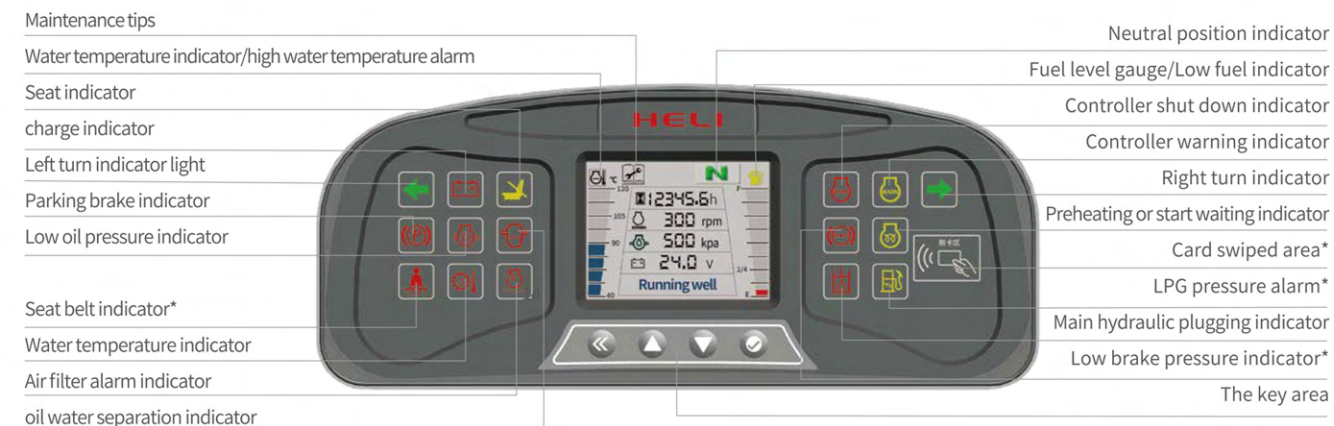

Reliable special meter displays the whole truck's working condition, fault detect and other important information completely which makes the operator master the whole truck condition directly and conveniently.

*: Some model options.

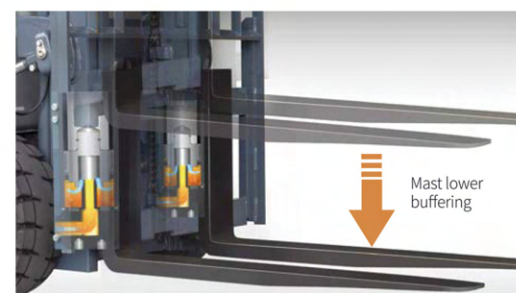


Standard mast lower buffering, while lift buffering is fitted for full free mast to achieve better operation experience.



Standard semi-enclosed seat, which is more comfortable for drivers.



Large steering angle axle is equipped to get smaller turning radius.

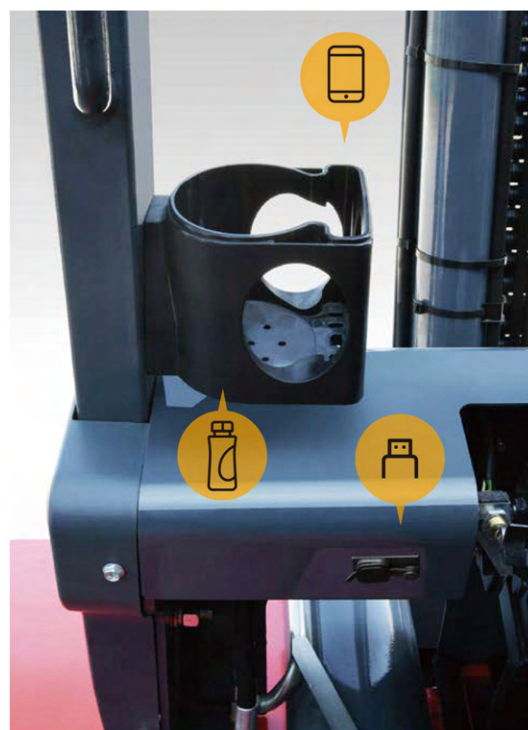

Standard cup seat. Option USB connector



Ratchet type hand brake



Cabinet with lock



Electro-hydraulic direction changing device



Integrated light switch



The rear view is more larger by optimizing the structure of counterweight.

CONVENIENT MAINTENANCE

Large opening
angle hood

Removable triangular
side cover

Two-stages opening
cabin door (optional)



Floor board with checking hole, which is convenient to gearbox maintenance.



Standard 9 inch air filter with iron shell is helpful to extend maintenance period.



Integrated electrical cabinet, dustproof and waterproof, easy to check



Radiator cover with supporting rod can open to 80 degrees. It is convenient to check.



Standard steering axle cylinder sleeve, which is more reliable for harsh working condition. Reasonable grease fitting layout makes lubrication more easy.

Technical drawings of a forklift showing side and top views with dimension labels.

Side View Dimensions:

- h_1 : Overall height at the rear.
- h_2 : Height of the mast at the front.
- h_3 : Height of the mast at the rear.
- h_4 : Height of the mast at the top.
- h_6 : Height of the rear counterweight.
- h_7 : Height of the rear wheel.
- h_{10} : Height of the front wheel.
- h_{13} : Height of the operator's seat.
- l : Overall length.
- x : Distance from the front wheel to the operator's seat.
- y : Distance from the operator's seat to the rear wheel.
- L_1 : Distance from the front wheel to the rear wheel.
- L_2 : Distance from the operator's seat to the rear wheel.
- α : Mast tilt angle.
- β : Mast tilt angle.


Top View Dimensions:

- $a/2$: Half of the fork spacing.
- b_1 : Fork width at the front.
- b_{10} : Fork width at the middle.
- b_5 : Fork width at the rear.
- l_6 : Fork length.
- l : Overall length.
- x : Distance from the front wheel to the operator's seat.
- Wa : Overall width.
- b_{11} : Rear wheel width.
- $a/2$: Half of the fork spacing.

Legend:

- Ast: 直角堆垛通道宽度 (Right-angle stacking aisle width)
- a: 间隙 (Gap)
- l: 货叉长度 (Fork length)

Optional engine model and truck main specifications						
Engine manufacturer /model	Vehicle model	Rated power/speed	Maximum torque/speed	Number of cylinders - diameter * stroke/displacement	Emission standard	Self weight (including oil and water)
Kubota WG3800	CP (Q) YD50/60/70-KU3K2	54.6/2400	271/1200	4-100*120/3.8	(Certified type) EPA T2/CARB3/EU V	8470/9000/9600
Kubota WG3800	CP (Q) YD50/60/70-KU1K2	54.6/2400	271/1200	4-100*120/3.8	Non authenticated	8440/8970/9570

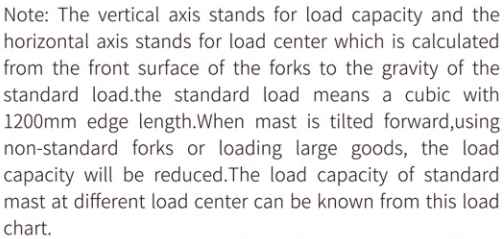

Note: 1) 8t: free lift without backrest. 2) With internal sideshift, the lifting weight is reduced by 200kg.

5T/6T/7T MAST PARAMETERS													
Mast type	Mast model	Max.lifting height (mm)	Load capacity (lode center 600mm)(kg)			Height (mast lowered)(mm)	Free lift height (with backrest) (mm)			Service weight (kg)			Mast tilt angle α/β (°)
			CPCD50	CPCD60	CPCD70		CPCD50/60/70	CPCD50	CPCD60	CPCD70	CPCD50	CPCD60	
Wide View Standard Mast	M220	2200	5000	6000	7000	2080	155	160	165	8096	8666	9266	6°/12°
	M250	2500	5000	6000	7000	2230	155	160	165	8134	8704	9304	6°/12°
	M270	2700	5000	6000	7000	2330	155	160	165	8161	8731	9331	6°/12°
	M300	3000	5000	6000	7000	2480	155	160	165	8200	8770	9370	6°/12°
	M330	3300	5000	6000	7000	2630	155	160	165	8239	8809	9409	6°/12°
	M350	3500	5000	6000	7000	2730	155	160	165	8265	8835	9435	6°/12°
	M375	3750	5000	6000	7000	2855	155	160	165	8298	8868	9468	6°/12°
	M400	4000	5000	6000	7000	3030	155	160	165	8431	9001	9601	6°/12°
	M425	4250	5000	6000	7000	3155	155	160	165	8463	9033	9633	6°/12°
	M450	4500	5000	6000	7000	3280	155	160	165	8496	9066	9666	6°/12°
	M475	4750	5000	6000	7000	3405	155	160	165	8529	9099	9699	6°/6°
	M500	5000	5000	6000	7000	3530	155	160	165	8562	9132	9732	6°/6°
	M550	5500	4750	5700	6600	3830	155	160	165	8726	9296	9896	6°/6°
M600	6000	4400	5400	6400	4080	155	160	165	8792	9362	9962	6°/6°	
Full Free 2-Stage Mast	ZM250	2500	5000	6000	7000	2210	840			7998	8568	9168	6°/12°
	ZM270	2700	5000	6000	7000	2310	940			8016	8586	9186	6°/12°
	ZM300	3000	5000	6000	7000	2460	1090			8043	8613	9213	6°/12°
	ZM330	3300	5000	6000	7000	2610	1240			8070	8640	9240	6°/12°
	ZM350	3500	5000	6000	7000	2710	1340			8088	8658	9258	6°/12°
	ZM375	3750	5000	6000	7000	2835	1465			8110	8680	9280	6°/12°
	ZM400	4000	5000	6000	7000	3010	1640			8227	8797	9397	6°/12°
	ZM425	4250	5000	6000	7000	3135	1765			8249	8819	9419	6°/12°
	ZM450	4500	5000	6000	7000	3260	1890			8272	8842	9442	6°/12°
	ZM475	4750	5000	6000	7000	3385	2015			8294	8864	9464	6°/6°
	ZM500	5000	5000	6000	7000	3510	2140			8316	8886	9486	6°/6°
	ZM550	5500	4750	5700	6600	3810	2440			8456	9026	9626	6°/6°
	ZM600	6000	4400	5400	6400	4060	2690			8500	9070	9670	6°/6°
Full Free 3-Stage Mast	ZSM360	3600	4500	5600	6200	2335	910			8738	9308	9908	6°/6°
	ZSM400	4000	4500	5600	6200	2460	1040			8797	9367	9967	6°/6°
	ZSM435	4350	4500	5600	6200	2585	1156			8852	9422	10022	6°/6°
	ZSM480	4800	4500	5600	6200	2740	1310			8927	9497	10097	6°/6°
	ZSM500	5000	4500	5600	6200	2805	1380			8955	9525	10125	6°/6°
	ZSM540	5400	4300	5400	6200	2940	1510			9020	9590	10190	6°/6°
	ZSM600	6000	4000	5100	5600	3135	1710			9203	9773	10373	6°/6°
	ZSM650	6500	3600	4600	5000	3405	1975			9314	9884	10484	6°/6°
	ZSM700	7000	3200	4000	4200	3510	2085			9365	9935	10535	6°/6°

Note:1) 5-6t:the free lift without backrest 260mm increase. 2) 7t:the free lift without backrest 180mm increase. 3) With internal sideshift, the lifting weight is reduced by 200kg. With external sideshifter, the lifting weight reduced by 300kg.

9T/10T MAST PARAMETERS												
Mast type	Mast model	Max.lifting height (mm)	Load capacity (lode center 600mm)(kg)		Height (mast lowered)(mm)		Free lift height (with backrest) (mm)		Service weight (kg)		Mast tilt angle α/β (°)	
			CPCD90	CPCD100	CPCD90	CPCD100	CPCD90	CPCD100	CPCD90	CPCD100	CPCD90/100	
Wide View Standard Mast	M250	2500	9000	10000	2450	2600	190	200	10971	12379	6°/12°	
	M270	2700	9000	10000	2550	2700	190	200	11025	12419	6°/12°	
	M300	3000	9000	10000	2700	2850	190	200	11650	12500	6°/12°	
	M330	3300	9000	10000	2800	3000	190	200	11751	12548	6°/12°	
	M350	3500	9000	10000	2950	3100	190	200	11896	12593	6°/12°	
	M375	3750	9000	10000	3075	3225	190	200	11976	12643	6°/12°	
	M400	4000	9000	10000	3250	3400	190	200	12151	12783	6°/12°	
	M425	4250	9000	10000	3375	3525	190	200	12306	12838	6°/12°	
	M450	4500	9000	10000	3500	3650	190	200	12426	12888	6°/12°	
	M475	4750	8800	9500	3625	3775	190	200	12551	12945	6°/6°	
	M500	5000	8500	9000	3750	3900	190	200	12686	13000	6°/6°	
	M550	5500	8000	8500	4050	4200	190	200	13008	13301	6°/6°	
	M600	6000	7500	7800	4300	4450	190	200	13211	13351	6°/6°	
	ZM250	2500	9000	10000	2450	2600	1250	1215	11697	12379	6°/12°	
Full Free 2-Stage Mast	ZM270	2700	9000	10000	2550	2700	1350	1315	11723	12419	6°/12°	
	ZM300	3000	9000	10000	2700	2850	1500	1465	11765	12500	6°/12°	
	ZM330	3300	9000	10000	2800	2975	1650	1615	11806	12548	6°/12°	
	ZM350	3500	9000	10000	2950	3100	1750	1715	11861	12593	6°/12°	
	ZM375	3750	9000	10000	3075	3225	1875	1840	11869	12643	6°/12°	
	ZM400	4000	9000	10000	3250	3400	2050	2015	12006	12783	6°/12°	
	ZM425	4250	9000	10000	3375	3525	2175	2140	12040	12838	6°/12°	
	ZM450	4500	9000	10000	3500	3650	2300	2265	12075	12888	6°/12°	
	ZM475	4750	8800	10000	3625	3775	2425	2390	12110	12945	6°/6°	
	ZM500	5000	8500	10000	3750	3900	2550	2515	12215	13000	6°/6°	
	ZM550	5500	8000	9000	4050	4200	2850	2815	12317	13301	6°/6°	
	ZM600	6000	7500	8000	4300	4450	3100	3065	12386	13351	6°/6°	
	ZSM360	3600	7500	8500	2450	2570	1200	1150	12291	13236	6°/12°	
	ZSM400	4000	7500	8500	2575	2700	1330	1280	12362	13328	6°/12°	
Full Free 3-Stage Mast	ZSM435	4350	7500	8500	2700	2820	1450	1400	12436	13408	6°/12°	
	ZSM450	4500	7500	8200	2750	2870	1500	1450	12463	13448	6°/6°	
	ZSM480	4800	7500	8000	2850	2970	1600	1550	12524	13516	6°/6°	
	ZSM500	5000	7500	7700	2950	3035	1700	1615	12580	13562	6°/6°	
	ZSM540	5400	6800	7000	3075	3225	1830	1805	12654	13696	6°/6°	
	ZSM600	6000	6100	6300	3375	3425	2130	2005	12825	13836	6°/6°	
	ZSM650	6500	5400	5600	3600	3590	2350	2170	12955	13954	6°/6°	
	ZSM700	7000	4600	4800	3750	3855	2500	2435	13043	14132	6°/6°	

Note:1)9-10t:free lift without backrest. 2)With internal sideshift, the lifting weight is reduced by 200kg.

Note: When the installation method of fork carrier or attachment is a series axis type, the standard configuration is without backrest. When it is a hook type, the backrest is standard configuration.

CONFIGURATION			
Configuration		General forklift (Isuzu)	
Packaging method	HELI Packing	●	
	Neutral Packing	○	
Economic and energy saving	Load sense steering and double pump confluence	●	
	LED lamps for whole truck	●	
Intelligent security	Hydraulic power braking	●	
	Tilting cylinder with self-locking valve	●	
	Reversing buzzer	●	
	Reverse radar and camera	○	
	OPS (only for driving)	○	
	OPS (Driving and lifting)	○	
	Electric power switch	○	
	Engine oil pressure alarm	●	
	Oil water separator indicator	●	
	Charging indicator	●	
	Water temperature gauge	●	
	Neutral start switch	●	
	Fire extinguisher	○	
	Spark arrester	○	
	Fuel cap with lock	●	
	Engine hood locking device	○	
	Reliability	Drum brake drive axle	●
		Wet-type brake drive axle (Mandatory cooling)	○
Hydraulic oil radiator		○	
9 inches double filter element air filter (with pressure alarm)		●	
Dry-type double air filter		○	
Self discharging ash filter		○	
Comfortable and convenient	Mechanical reversing	●	
	intelligent gear shift	○	
	Steering wheel with knob (HELI packing)	●	
	Steering wheel without knob (HELI packing)	○	
	Steering wheel with knob (Neutral packing)	○	
	Full hydraulic power steering	●	
	Mast rear cylinder with lower buffering and front cylinder with lifting buffering	●	
	Speed limiting valve for lifting oil circuit	●	
	Man-machine interactive liquid crystal instrument	●	
	Fan	○	
	USB interface	○	
	Rear view mirrors at both sides	○	
	Get on/off handle	●	
	Half enclosed seat	●	
	Semi suspension seat	○	
Full suspension seat	○		
Top frame options	Standard overhead guard	●	
	Low height overhead guard (150mm lower)	○	